


1. Prepare a USB disk (USB drive)

2. Right click and select format... Format USB disk to FAT32 format, and change the Volume label to WINPE, click start to finish formatting

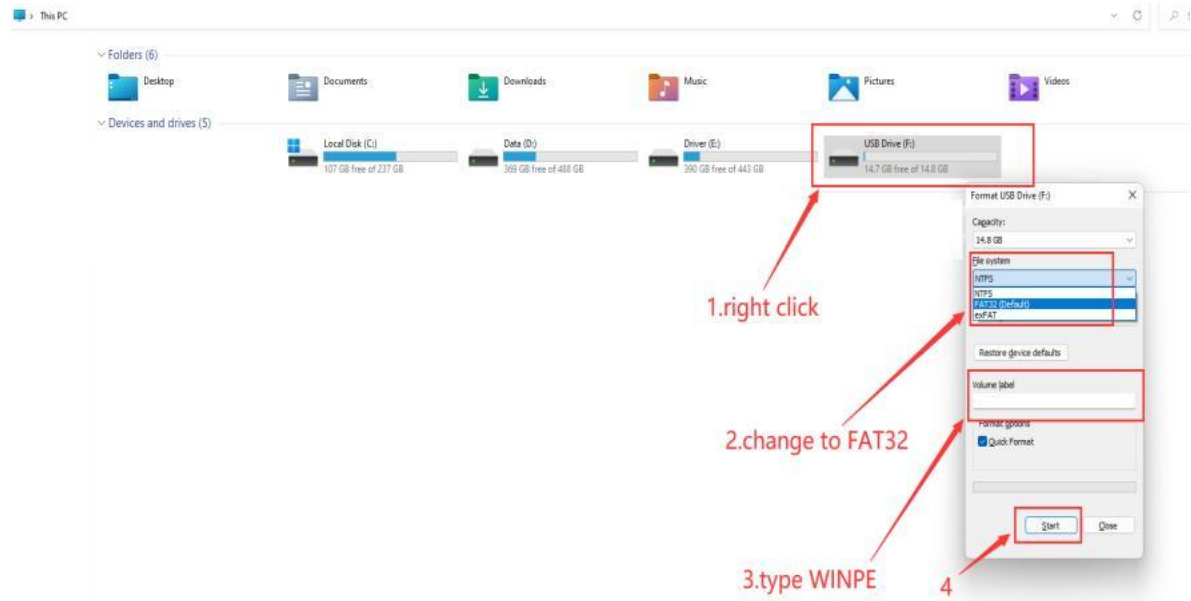


3. Copy the BIOS file to USB disk, and it must be in the root directory of USB disk.

Name	Date modified	Type	Size
EFI	1/6/2026 10:23 AM	File folder	
AfuEfix64.efi	1/6/2026 10:23 AM	EFI File	615 KB
AFUWINx64	1/6/2026 10:23 AM	Application	1,126 KB
amifldr64.sys	1/6/2026 10:23 AM	System file	29 KB
amigendr64.sys	1/6/2026 10:23 AM	System file	36 KB
flash.nsh	1/6/2026 10:23 AM	NSH File	1 KB
GTRPR05.rom	1/6/2026 10:27 AM	ROM File	32,768 KB
WinFlash	1/6/2026 10:23 AM	Windows Batch File	1 KB
WinRing0x64.dll	1/6/2026 10:23 AM	Application extens...	57 KB
WinRing0x64.sys	1/6/2026 10:23 AM	System file	15 KB

4. Restart the computer, press **F7** repeatedly on the boot logo interface, and select **USB** boot in the boot options



5. If the BIOS flashes automatically, please wait till it finishes. If not, type `fs3:` (you may type `fs0:-fs4:`, depends on where the USB drive is), then press enter

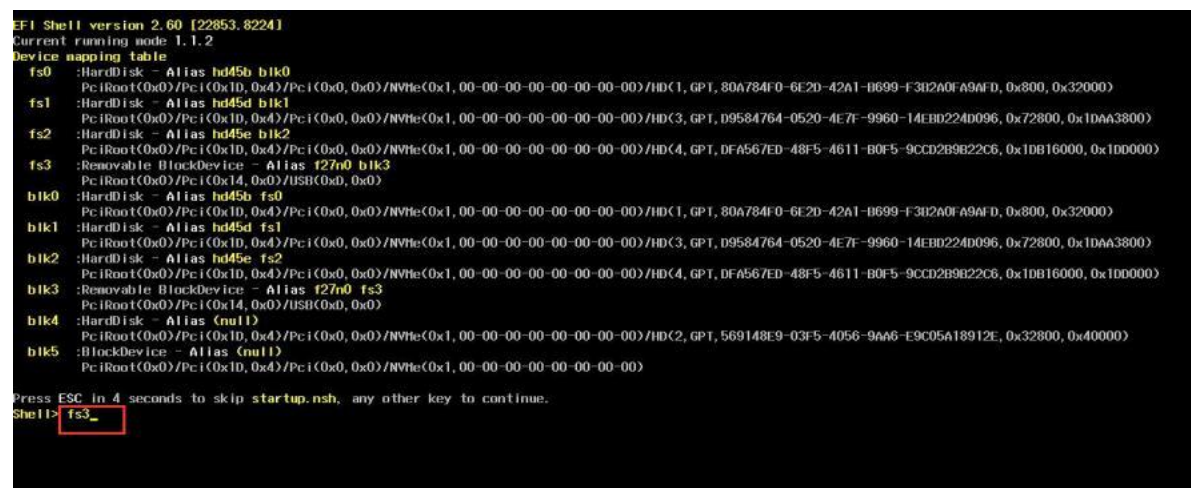

6. Type `dir` or `ls`, press enter so that you can locate the files



7. Type flash, press tab, then press enter.

```
EFI Shell version 2.60 (20052 92943)
Curr
Devil
fs3:
fs3:
fs3:
fs3:
fs3:
Boot Manager
Boot Option Menu
EFI Boot Devices
Windows Boot Manager (NVME SSD 256GB)
EFI USB Device (Beelink OS)
EFI PXE 1 for IPv6 (5C-85-7E-48-0B-77)
EFI PXE 1 for IPv4 (5C-85-7E-48-0B-77)
EFI PXE 0 for IPv6 (5C-85-7E-48-0B-76)
EFI PXE 0 for IPv4 (5C-85-7E-48-0B-76)
Internal EFI Shell
↑ and ↓ to change option, ENTER to select an option, ESC to exit
Pres
Shel
fs3:\> ls
Directory of: fs3:\
01/25/21 02:37a          131,072  C06e_v2.03.BIN
01/25/21 02:37a              268  Checksum.txt
01/25/21 02:37a        102,656  eFuitX64.efi
01/25/21 02:37a              246  FEC64.NSH
03/29/21 03:03p <DIR>          8,192  | | |
4 File(s)      234,242 bytes
1 Dir(s)
fs3:\> flash_
```

8. APT10 SETUP.AMI screen pop up, please select PROCEED WITH FASH UPDATE. Start flashing, if there is a similar reminder, enter exit.

```
ITE Flash Utility Version : D.2.9
----- Mar 15 2016 10:23:39

Device ID       : FF FF FE FF
SPI Vendor      : ITE eflash

Erasing...      : *****
Erase verify... : *****

Programming... : *****
Programme verfiy... : *****

Update EC Rom sucessfully!

fs3:\> exit_
```