





1.Prepare the bios files that need to be updated

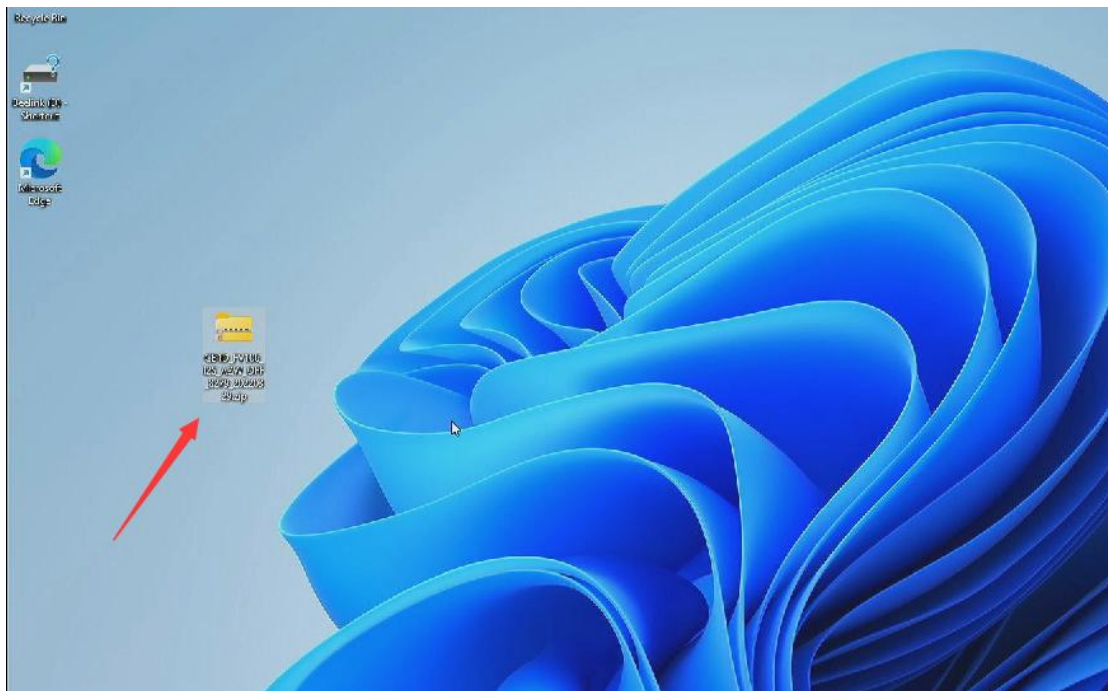


2. Extract the zip file to the desktop, the path indicated by the arrow in the figure below, and check “show extracted files when complete”

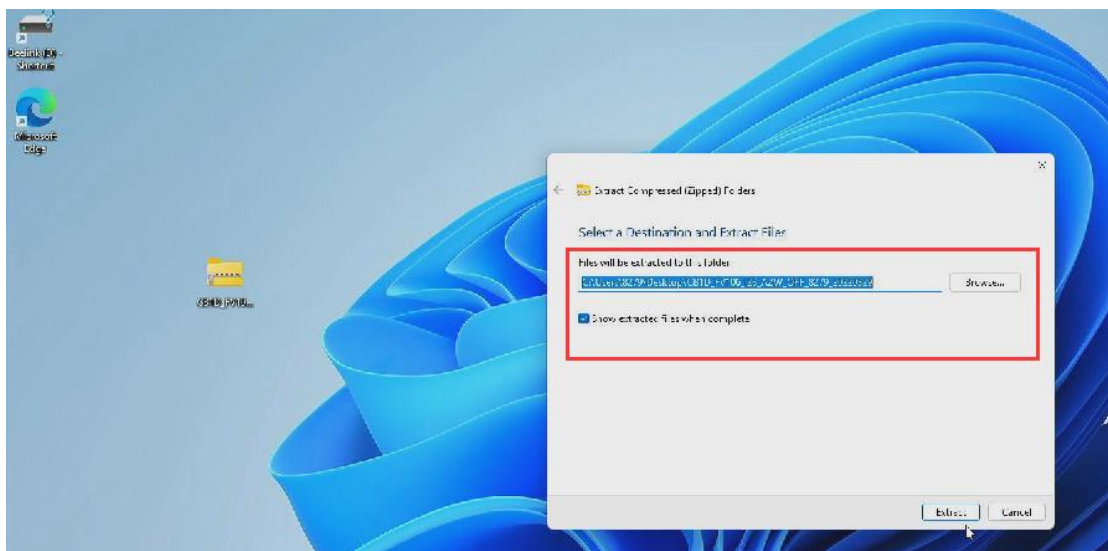


3. Double click to enter the folder, double click again on the Win folder

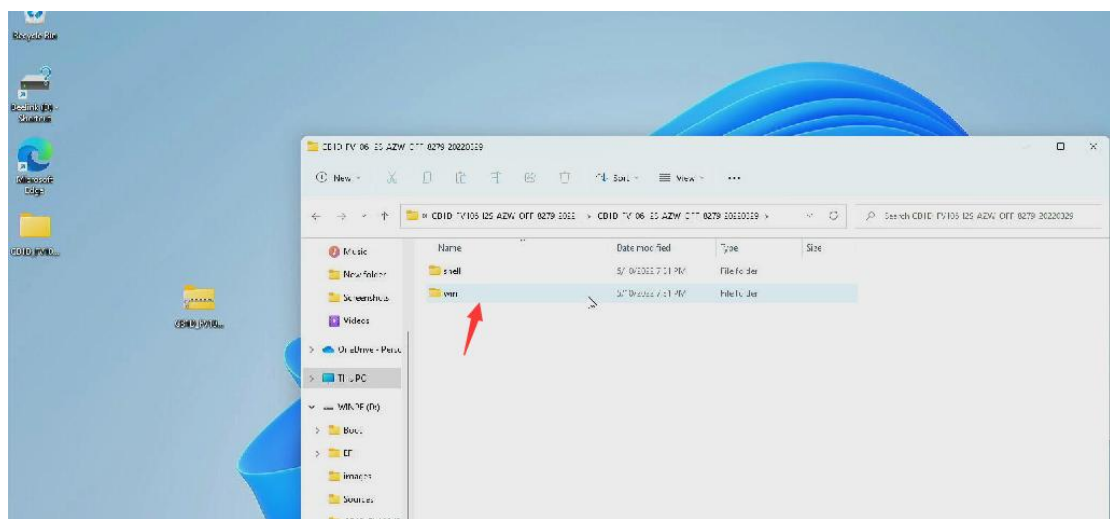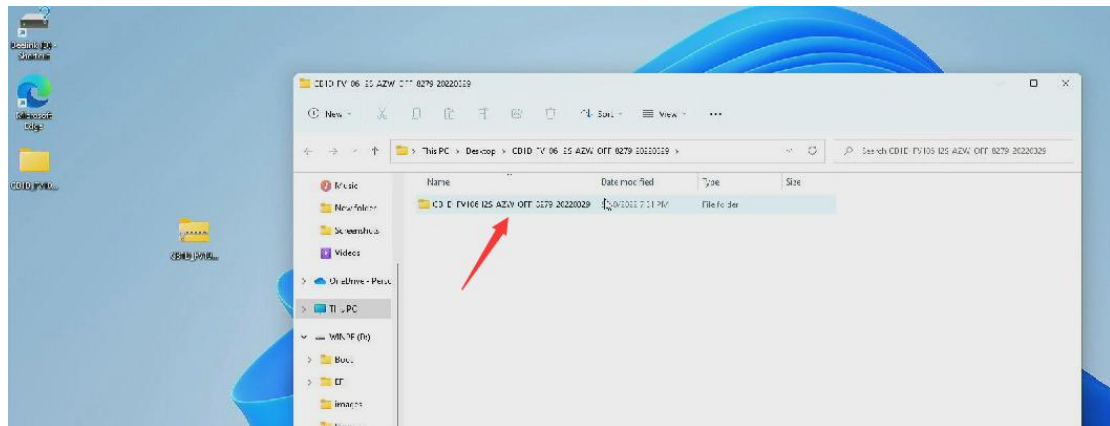


4. Select the address bar and copy the full name (ctrl+c <use keyboard>)

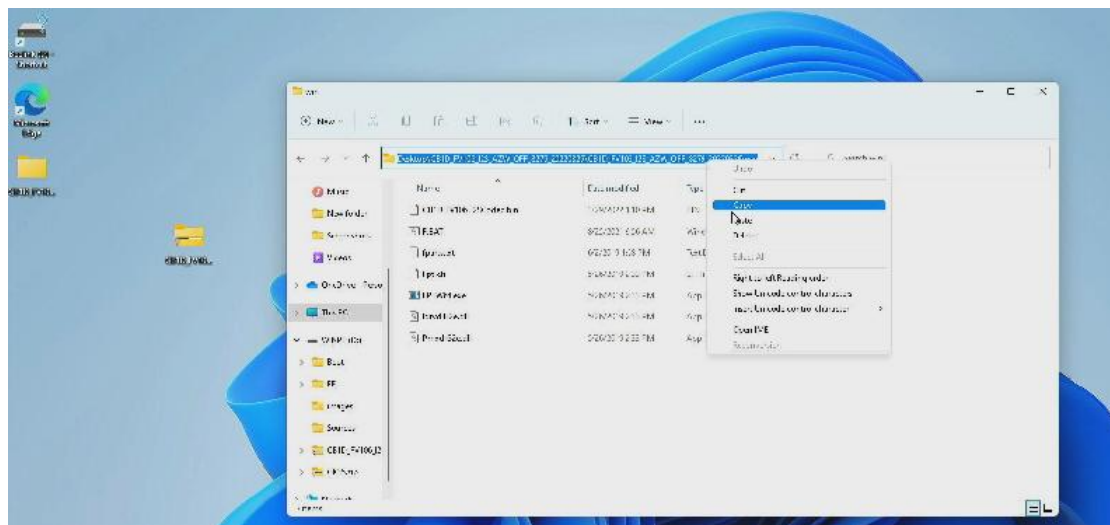


5.Right-click the Windows and select Windows Terminal (Admin) (1>2)

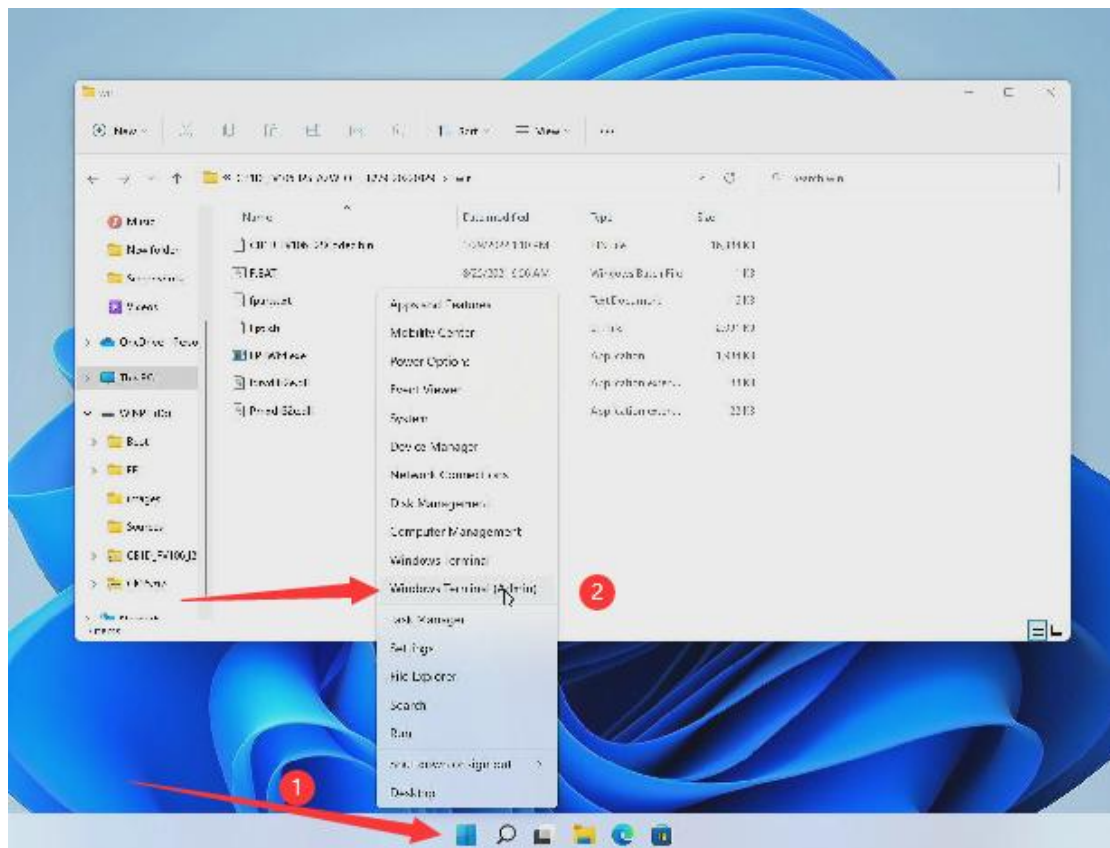


6. Click Yes

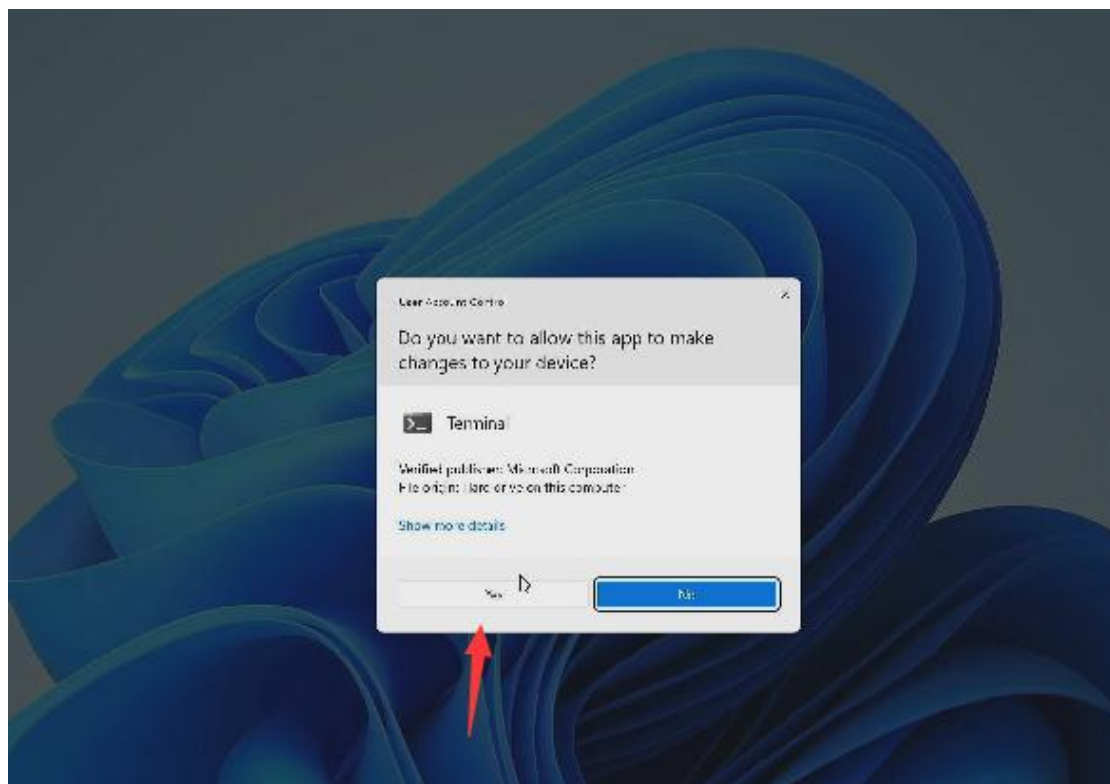


7.Type **CD** , click the space bar on your keyboard, then paste the name of the file (ctrl+v) and press the Enter<use keyboard>.

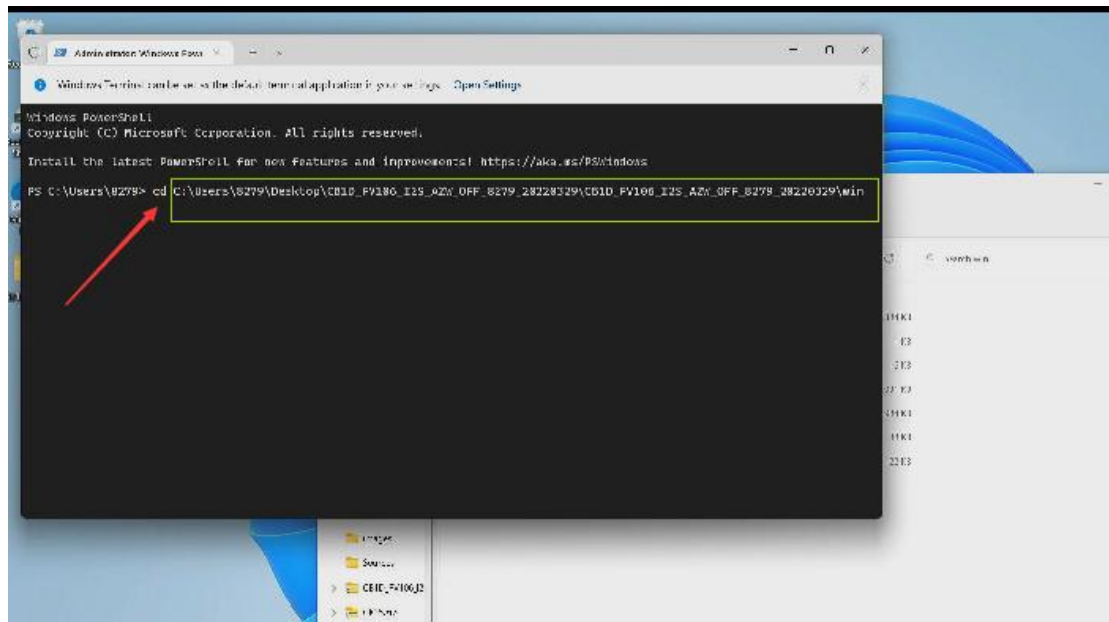


8.Type **ls** and press the Enter.

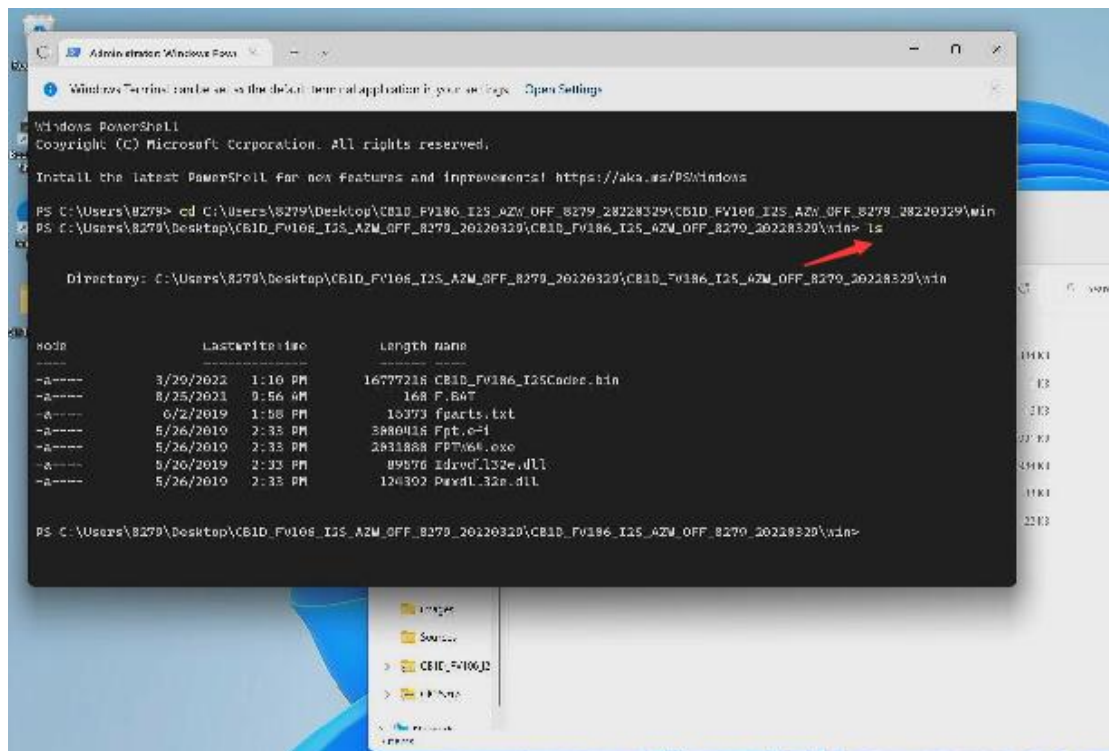


9. Type **F** and press <Tab> then Enter <use keyboard>.

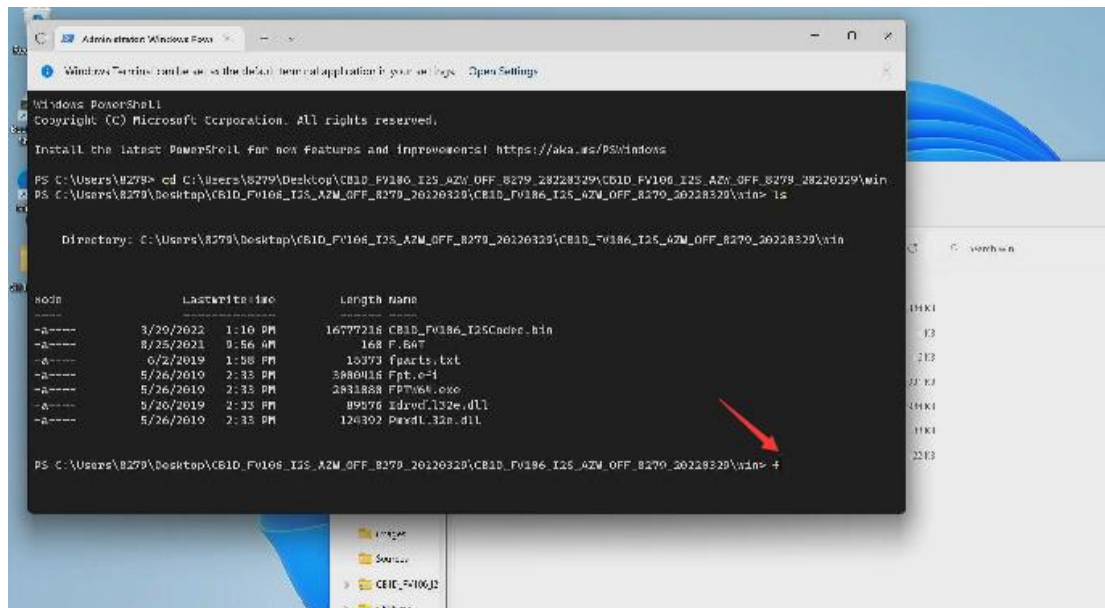

10. The system will enter the Bios update process, press any key to start

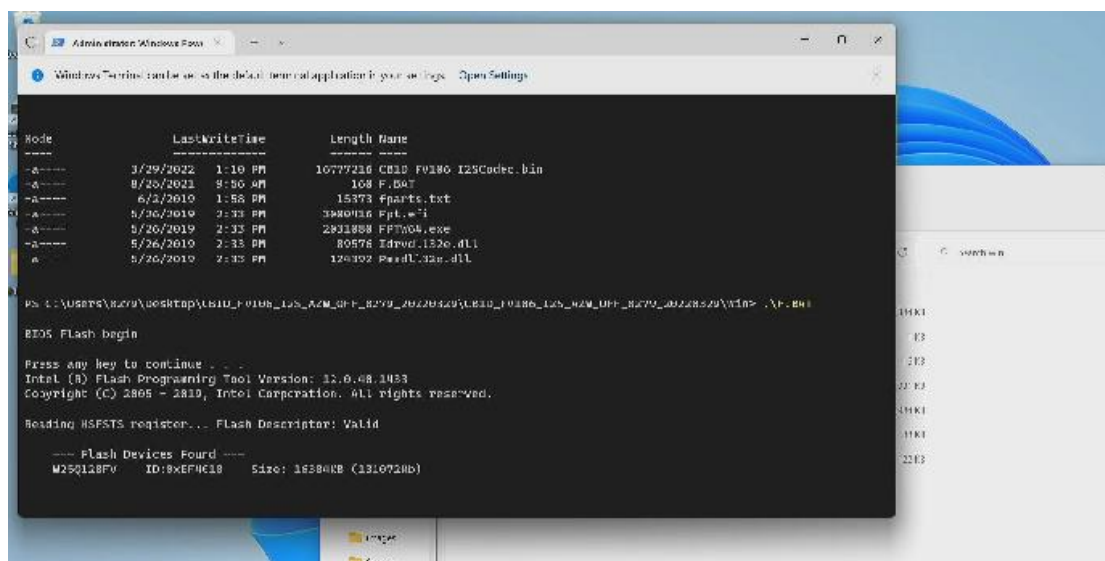

11. When the green font of FPT Operation successful appears, the program can be closed and the Bios update is complete.

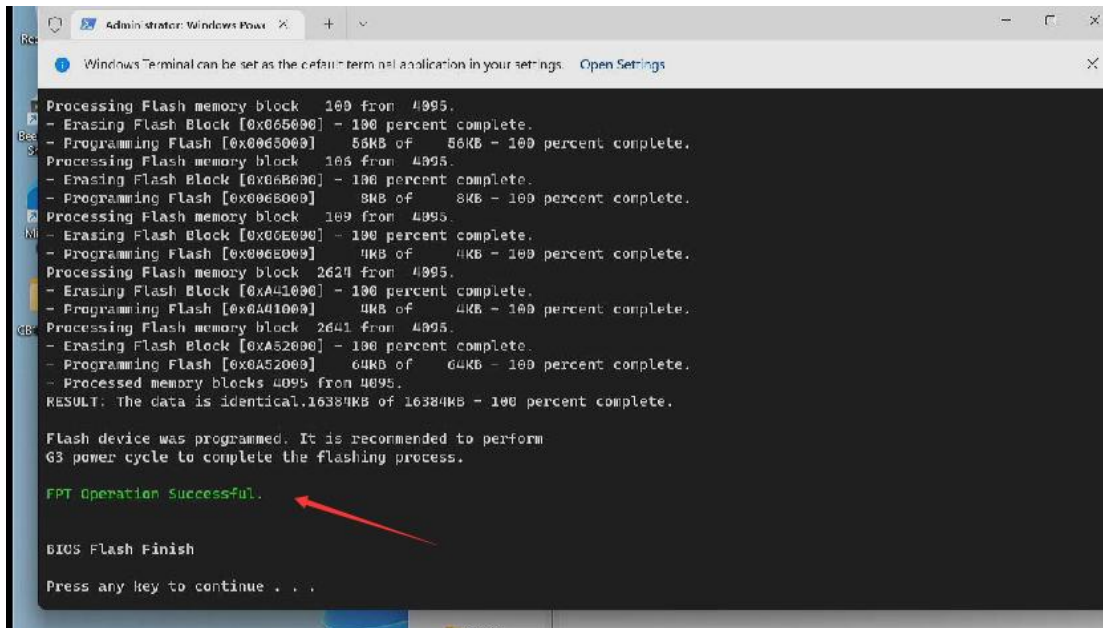

```
Processing Flash memory block 160 from 4895.  
- Erasing Flash Block [0x065000] - 100 percent complete.  
- Programming Flash [0x065000] 56KB of 56KB - 100 percent complete.  
Processing Flash memory block 168 from 4895.  
- Erasing Flash Block [0x066000] - 100 percent complete.  
- Programming Flash [0x066000] 8KB of 8KB - 100 percent complete.  
Processing Flash memory block 169 from 4895.  
- Erasing Flash Block [0x06E000] - 100 percent complete.  
- Programming Flash [0x06E000] 4KB of 4KB - 100 percent complete.  
Processing Flash memory block 2624 from 4895.  
- Erasing Flash Block [0xA41000] - 100 percent complete.  
- Programming Flash [0xA41000] 4KB of 4KB - 100 percent complete.  
Processing Flash memory block 2641 from 4895.  
- Erasing Flash Block [0xA52000] - 100 percent complete.  
- Programming Flash [0xA52000] 64KB of 64KB - 100 percent complete.  
- Processed memory blocks 4895 from 4895.  
RESULT: The data is identical.16384KB of 16384KB - 100 percent complete.  
  
Flash device was programmed. It is recommended to perform  
63 power cycle to complete the flashing process.  
  
FPT Operation Successful.  
  
BIOS Flash Finish  
  
Press any key to continue . . .
```

